
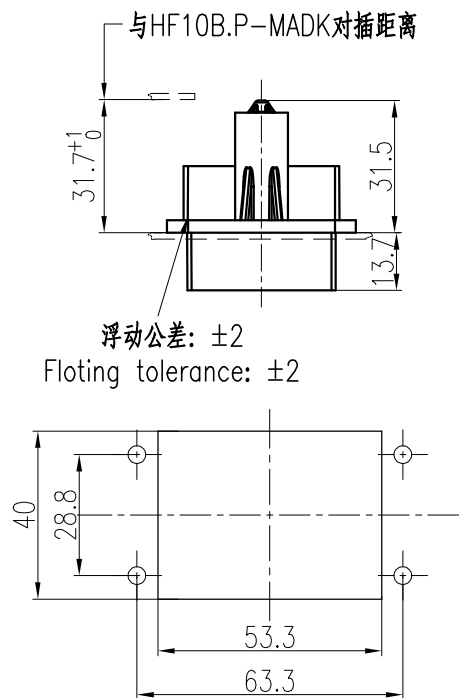


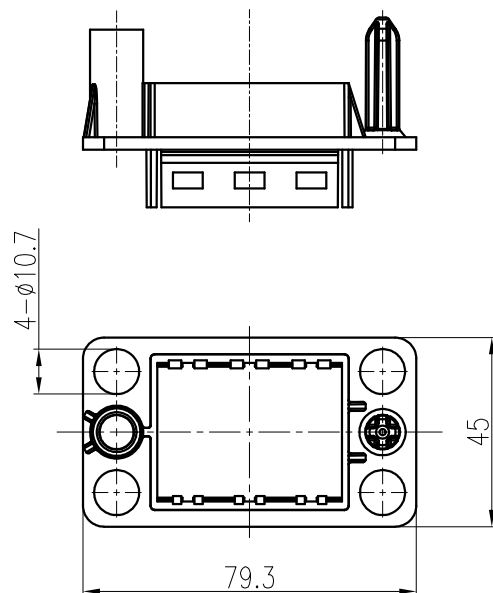

浮动公差: ± 2

Floting tolerance: ± 2

开孔尺寸图


(Paenl cut out)

技术参数:

- 模块数量: 3
- 材料: 聚碳酸酯
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 可插拔次数: ≥ 500
- 浮动公差: $\pm 2\text{mm}$
- 锁定公差: $\pm 4\text{mm}$

Technical specification:

- No. of module: 3
- Material: polycarbonate
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Mating cycles: ≥ 500
- Floating Tolerance: $\pm 2\text{mm}$
- Locking range: $\pm 4\text{mm}$

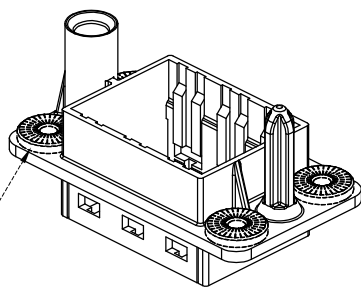

1980020010003 HF-ADK-D15

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	HF10B.P—FADK
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date				产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	SY JI	07.02.2023	标准化 Stand.	—	—	2:3	V3.1	18.9g	—		
审核 Checked	HZ LAN	07.02.2023									
工艺 Process	—	—	批准 Approved	HQ ZHANG	07.02.2023			All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	