

日期/Date

档案员
Filing Clerk

1

2





3

4


5

6

与HF10B.P-FADK对插
距离

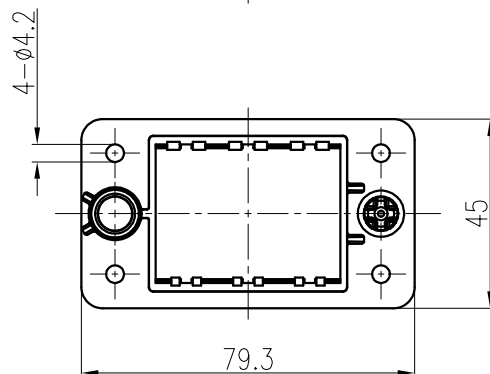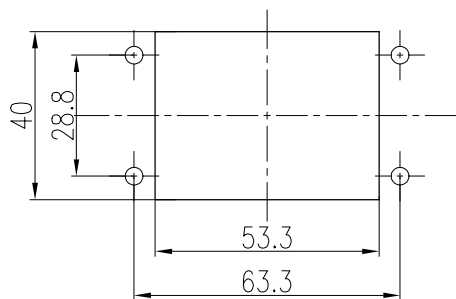

开孔尺寸图
(Paenl cut out)

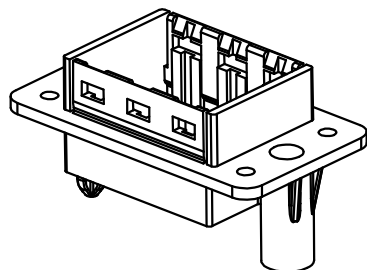

技术参数:

- 模块数量: 3
- 材料: 聚碳酸酯
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 可插拔次数: ≥ 500
- 浮动公差: $\pm 2\text{mm}$
- 锁定公差: $\pm 4\text{mm}$

Technical specification:

- No. of module: 3
- Material: polycarbonate
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Mating cycles: ≥ 500
- Floating Tolerance: $\pm 2\text{mm}$
- Locking range: $\pm 4\text{mm}$

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	HF10B.P-MADK
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date		产品料号 Part No.	1110101001501
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.
绘图 Drawn	SY JI	07.02.2023	标准化 Stand.	—	—	2:3	V3.1	22.3g	—
审核 Checked	HZ LAN	07.02.2023							
工艺 Process	—	—	批准 Approved	HQ ZHANG	07.02.2023	All Dimensions in mm Original Size DIN A 4			
								WAIN 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	