

技术参数:

- 产品系列: MR23
- 插针数: 9
- 插针直径(mm) : 8* $\phi 1+1*\phi 2$
- 接线范围(mm²) : 0.03-1.0 + 0.35-2.5
- 接线方式: 冷压连接
- 额定电流(25℃): 10A
- 额定电压: 160V
- 额定脉冲电压: 2.5KV
- 过电压保护等级: III
- 污染等级: 3
- 插针需单独订购。

机械参数:

- 外壳材质: 铜合金, 锌合金
- 外壳表面处理: 镀镍
- 插芯材质: PBT
- 密封材质: 氟橡胶
- 温度范围: -40℃...+130℃
- 电缆直径: 4.5-14.5mm 屏蔽
- 插拔次数: >500
- 防护等级: IP67

Technical specification:


- Series: MR23
- Number of contacts: 9
- Contact diameter(mm): 8* $\phi 1+1*\phi 2$
- Wire gauge(mm²): 0.03-1.0 + 0.35-2.5
- Terminal: Crimp
- Rated current(25℃): 10A
- Rated voltage: 160V
- Rated impulse voltage: 2.5KV
- Overvoltage category: III
- Pollution degree: 3

Mechanical specification:

- Material of housing: CuZn,Zinc(GD-Zn)
- Finish of housing:Nickel-plated
- Material of Insert:PBT
- Material of sealing:FPM
- Temperature range: -40℃...+130℃
- Cable Outlet: 4.5-14.5mm Shielded
- Mating cycles: >500
- Degree of protection: IP67
- Contact need to be ordered separately.



插针数 Contacts	电缆出口直径 ϕ Cable outlet	产品料号 Cable outlet	型号 Part Code	重量 Weight
9	4.5-8 mm	1810097002539	MR23-009R-CCT/R28-D8-SH	96g
	6-10 mm	1810097002540	MR23-009R-CCT/R28-D10-SH	95.4g
	9-14.5 mm	1810097002541	MR23-009R-CCT/R28-D14.5-SH	93.9g

面板开孔图

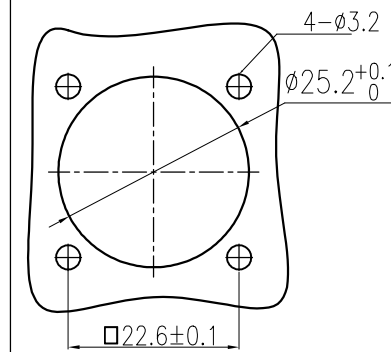

针位排布图

Contact arrangement

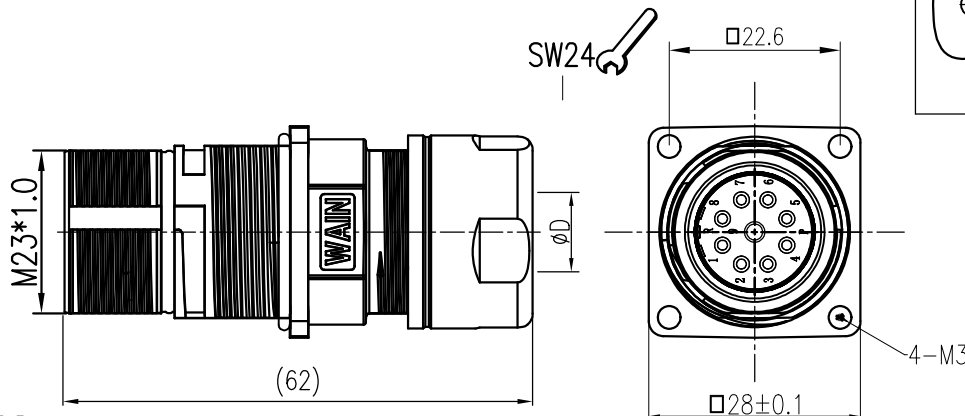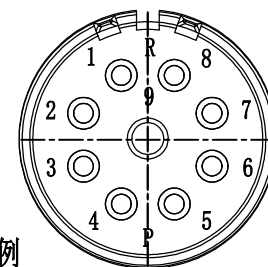

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	MR23-009R-CCT/R28-DXX-S
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date	—			产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	JS WU	04.11.2022	标准化 Stand	—	—	1:1	V1.0	—	—		
审核 Checked	ZQ XU	04.11.2022									
工艺 Process	—	—	批准 Approved	HQ ZHANG	04.11.2022	 			All Dimensions in mm Original Size DIN A 4		
										 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	