


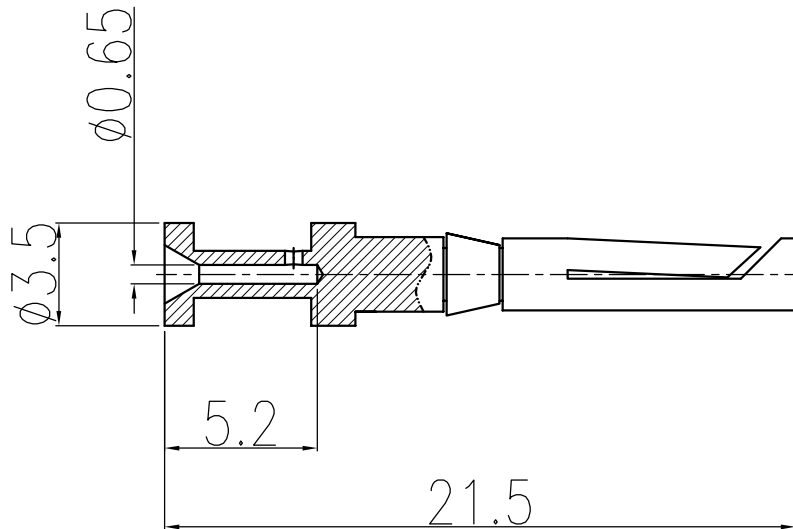

技术参数:

- 材料: 铜合金
- 表面处理: 镀金
- 额定电流: 10A
- 接触电阻: $\leq 3\text{m}\Omega$
- 工作温度范围: $-40^{\circ}\text{C}\dots+125^{\circ}\text{C}$
- 线径范围: $0.09\text{--}0.25\text{mm}^2$ (28–24 AWG)
- 可插拔次数: ≥ 500

Technical specification:

- Material: copper alloy
- Surface: hard-gold plated
- Rated current: 10A
- Contact resistance: $\leq 3\text{m}\Omega$
- Limiting temperatures: $-40^{\circ}\text{C}\dots+125^{\circ}\text{C}$
- Wire gauge: $0.09\text{--}0.25\text{mm}^2$ (28–24 AWG)
- Mating cycles: ≥ 500

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	CDGF-0.25
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date			产品料号 Part No.		1010172200101
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—	4:1	V1.1	0.6g	—		
审核 Checked	P RAO	18.10.2010				 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD	
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010						